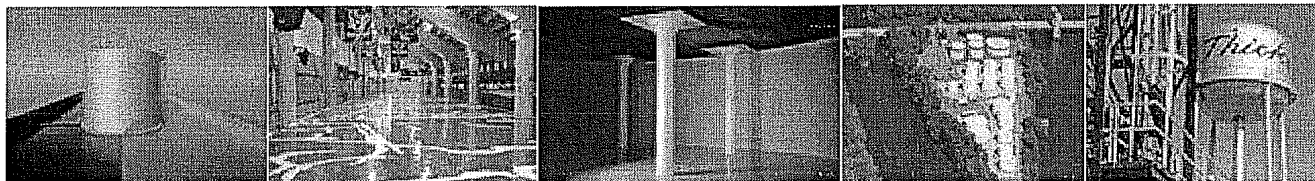



[home](#) | [site map](#)
[Products](#)
[Technologies](#)
[Industries](#)
[Project Profiles](#)
[Literature](#)
[About Us](#)
[News](#)
[Contact Us](#)


## THIOKOL® Polysulfide Coatings and Sealants

NSF Approved Non-Sag Flexible Sealant • Commercial & Industrial Grade Sealants • Durable Flooring & Tank Linings • Flexible Containment Liners • Parking Deck Systems

### THIOKOL® Coatings & Sealants

THIOKOL® Coatings and Sealants are based on many years of proprietary polysulfide technology for building, construction and industrial applications. The advantages of coatings and sealants formulated with polysulfide polymers derive from their excellent UV resistance and weatherability, their ability to remain flexible down to -65°F, and their outstanding fuel and solvent resistance.

THIOKOL® Sealants will provide as long as twenty-year service life under normal application conditions, which surpasses that of commonly used polyurethane sealants. Typical sealant applications include filling joints in commercial building panels, concrete slab expansion joints, airport runway joints and sealing rivets, weld seams and chimes in storage tanks.

THIOKOL® Coatings are truly unique. Epoxy and epoxy novolac coatings formulated with polysulfide provide chemical resistant, tough, abrasion resistant properties that are superior to conventional epoxies. They are used as floor coatings, tank linings and containment coatings. Polysulfide linings for secondary containment and liners for earthen containment dikes meet or exceed regulatory requirements for these areas.



[THIOKOL® Product Line](#) | [THIOKOL® Technical Data Sheets](#)

[>>> back to Technologies](#)

Contact: [info@polyspec.com](mailto:info@polyspec.com) | toll free: 888-797-0033 | 281-397-0033 | 281-397-6512 fax | 6614 Gant Rd. Houston TX 77066

© 2006-2007 PolySpec LP | All rights reserved. | [Terms](#) | [Warranty](#) | [Privacy](#) | [Feedback](#) | [Site Design](#)

### Related Items of Interest:

#### Project Profiles: THIOKOL® Coatings & Sealants

- [Reliant Stadium](#)
- [Noah's Glen](#)
- [Louis Dreyfus Energy Corporation](#)
- [Esso Petrolera Argentina SRL](#)
- [Kelley Racing](#)
- [Oldelval SA](#)

#### *Espanol:*


- [Esso Petrolera Argentina SRL](#)
- [Oldelval SA](#)

[See all Project Profiles](#)

#### Technology Brochures:

- [THIOKOL® Coatings](#)
- [THIOKOL® Sealants](#)

PolySpec, TuffRez, FlakeRez, NovoRez, PermaRez, RezRok, FLEX and 7K are registered trademarks of Polyspec L.P.  
Ultra-Fresh is a registered trademark of Thomson Research Associates  
THIOKOL is a registered trademark of Toray Thiokol Co., Ltd.

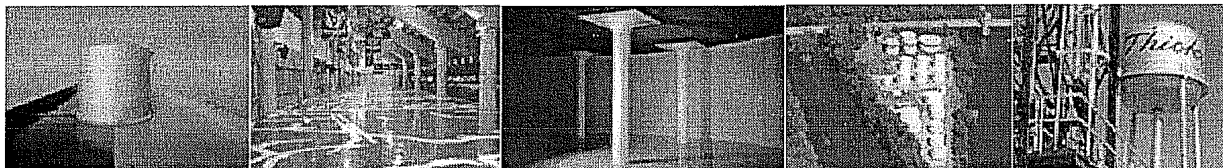
[home](#) | [site map](#)
[Products](#)   [Technologies](#)   [Industries](#)   [Project Profiles](#)   [Literature](#)   [About Us](#)   [News](#)   [Contact Us](#)


## Technical Data Sheets: Thiokol® Coatings, Linings and Sealants

[>>> back to Technical Data Sheets](#)

### Flexible Coatings & Linings

- **Thiokol FEC 2233**  
Concrete & Steel Coating, Flexible Epoxy
- **Thiokol FEC 2234**  
Concrete & Steel Coating/Membrane, Flexible Epoxy
- **Thiokol FNEC 2369**  
Concrete Coating, Semi-Flexible Novolac Epoxy
- **Thiokol FNEC 2515**  
Concrete & Steel Coating, Flexible Novolac Epoxy
- **Thiokol LPE 5020**  
Concrete & Steel Coating, Elastomeric Polysulfide, Fast Set
- **Thiokol LPE 5100**  
Concrete & Steel Coating, Flexible Epoxy Novolac, Splash Zone
- **Thiokol RLP 2378+**  
Steel & Earthen Dike Lining, Reinforced Elastomeric Polysulfide

### Flexible Sealants

- **Thiokol 2235M**  
Industrial Polysulfide Joint Sealant, Non Sag, NSF Approved
- **Thiokol 2235SL**  
Industrial Polysulfide Joint Sealant, Self Leveling
- **Thiokol 2282**  
Industrial Polysulfide Joint Sealant, Ultra Chemical Resistant
- **Thiokol 200E**  
Industrial Polysulfide Joint Sealant, Self Leveling, Fast Set
- **PolySpec 196SL**  
Industrial Joint System, Chemical Resistant Coating
- **PolySpec 196BA**  
Industrial Joint System, Bonding Agent for PolySpec 196SL over Polysulfide Sealant

### Primers

- **PolySpec 300EX**  
Epoxy Performance Primer for Concrete
- **PolySpec TITE M-50**  
Anti-Corrosive Primer for Steel
- **Thiokol 415**  
Primer for Polysulfide Sealants

Contact: [info@polyspec.com](mailto:info@polyspec.com) | toll free: 888-797-0033 | 281-397-0033 | 281-397-6512 fax | 6614 Gant Rd. Houston TX 77066

© 2006-2007 PolySpec LP | All rights reserved. | [Terms](#) | [Warranty](#) | [Privacy](#) | [Feedback](#) | [Site Design](#)

PolySpec, TuffRez, FlakeRez, NovoRez, PermaRez, RezRok, FLEX and 7K are registered trademarks of Polyspec L.P.  
Ultra-Fresh is a registered trademark of Thomson Research Associates  
THIOKOL is a registered trademark of Toray Thiokol Co., Ltd.

## DESCRIPTION

FEC 2234 is a multi-functional, 100% solids, two-component, polysulfide enhanced epoxy coating and membrane sealant suited for use on concrete and steel in primary and secondary containment applications. Its flexibility and ease of application also make it ideal for use as a crack-sealing coating.

## TYPICAL APPLICATION

• Primer	PolySpec 300EX @ 5-7 mils (concrete) or PolySpec TITE M-50 @ 4-5 mils (steel)
• Basecoat	FEC 2234 @ 12-16 mils
• Topcoat	FEC 2234 @ 12-16 mils
• Options	Non-Skid Grit Engineering Fabric

## PERFORMANCE DATA

Compressive Strength (ASTM C-579)	30,000 psi
Tensile Strength (ASTM D-638)	+600 psi
Flexural Strength (ASTM C-580)	4,300 psi
Hardness, Shore D (ASTM D-2240)	35-45
Bond Strength (ASTM D-4541)	425 psi
Abrasion Resistance (ASTM D-4060)	70 mg
Elongation, % at break (ASTM D-639)	45-55
C-Tear, lbs/in (ASTM D-1004)	200+
Impact Strength, in/lbs (ASTM D-4226)	60+
VOC	0.00 lb/gal; 0.0 gm/L
Volume Solids	100%

## STORAGE & INSTALLATION

Storage Environment	Dry area, 65-80°F
Application Temperature, ambient	50-95°F
Application Temperature, substrate	Minimum 5°F above dew point
Shelf Life	1 year
Pot Life, @ 77°F	30 minutes
Foot Traffic, @ 77°F	16 hours
Full Service, @ 77°F	72 hours

*Material cures more slowly at cooler temperatures, and working time will be substantially reduced at higher temperatures. In hot weather, material should be cooled to 65°F to 80°F prior to mixing and application to improve workability and avoid shortened pot life. The data shown above reflects typical results based on laboratory testing under controlled conditions. Reasonable variations from the data shown above may result.*

## CONSIDERATIONS & LIMITATIONS

1. PolySpec recommends the use of a slip resistant grit with this product.
2. Floors should be sloped to drain to prevent standing water or chemicals. As with any surface, all spills should be removed as soon as possible to prevent a slipping hazard.
3. Do not thin with solvents unless advised to do so by PolySpec.
4. Confirm product performance in specific chemical environment prior to use.
5. Prepare substrate according to "Surface Preparation" portion of this document.
6. Do not apply to slabs on grade unless a heavy unruptured vapor barrier has been installed under the slab.
7. Always use protective clothing, gloves and goggles consistent with OSHA regulations during use. Avoid eye and skin contact. Do not ingest or inhale. Refer to Material Safety Data Sheet for detailed safety precautions.
8. For industrial/commercial use. Installation by trained personnel only.

# THIOKOL

## FEC<sup>®</sup> 2234

TECHNICAL DATA SHEET

## Concrete & Steel Coating/Membrane, Flexible Epoxy

### BENEFITS

- Maintains flexible nature over long term
- Excellent resistance to chipping
- Excellent penetration and bond strength
- Resistant to dilute acids, caustics and petroleum solvents
- Low odor, 100% solids epoxy
- Increased thermal shock resistance
- High abrasion resistance
- Versatile uses — concrete repair to finish coating

### RECOMMENDED USES

- Primary containment tanks
- Secondary containment dikes
- Loading dock areas
- Manufacturing floors
- Warehouse floors
- Drum storage areas
- Vehicle service bays
- Mechanical equipment rooms
- Water park & recreational floors
- Covered parking decks
- Crack-bridging membrane sealant

### GENERIC DESCRIPTION

Polysulfide-Modified Epoxy

### STANDARD COLORS

Light Gray

### PACKAGING

2-Gallon Unit

### COVERAGE

100 ft<sup>2</sup> / gallon @ 16 mils

## SURFACE PREPARATION

**Concrete:** Apply only to clean, dry and sound concrete substrates that are free of all coatings, sealers, curing compounds, oils, greases or any other contaminants.

- New concrete should be cured a minimum of 28 days.
- Concrete that has been contaminated with chemicals or other foreign matter must be neutralized or removed.
- Remove any laitance or weak surface layers.
- Concrete should have a minimum surface tensile strength of at least 300 PSI per ASTM D-4541.
- Surface profile shall be CSP-3 to CSP-5 meeting ICRI (International Concrete Repair Institute) standard guideline #03732 for coating concrete, producing a profile equal to 60-grit sandpaper or coarser. Prepare surface by mechanical means to achieve this desired profile.
- Moisture vapor transmission should be 3 pounds or less per 1,000 square feet over a 24 hour time period, as confirmed through a calcium chloride test, as per ASTM E-1907. Quantitative relative humidity (RH) testing, ASTM F-2170, should confirm concrete RH results <75%.
- All surface irregularities, cracks, expansion joints and control joints should be properly addressed prior to application.
- Outgassing may occur due to the porosity of some concrete surfaces. To reduce the effect of outgassing, the primer and coating should be applied when the temperature of the concrete substrate is dropping. This usually occurs in the evening; however, the concrete substrate temperature should be measured with a surface thermometer for verification. Double priming will greatly reduce the effects of outgassing by additionally filling the pores in the concrete.

**Steel:** For immersion service, "White Metal" abrasive blast with an anchor profile of 2-4 mils in accordance with Steel Structures Painting Council Specification SP-5-63 or NACE No. 1 is required. For splash and spillage exposure, "Near White" SP-10-63 or NACE No. 2 is required.

**Refer to PolySpec Surface Preparation Guidelines for more details.**

## INSTALLATION STEPS

1. Prime surface with PolySpec 300EX or PolySpec TITE M-50 Primer. See data sheet for application details.
2. Component A Resin should be premixed prior to using due to possible pigment settling that may occur during transportation and storage.
3. Pour Component B Hardener into the Component A Resin pail and mix well with a mechanical jiffy-type mixer operated at low speed. Scrape the side of the pail to ensure the entire product has been properly mixed; any unmixed material left on the side of the pail will not cure.

*NOTE: Do not turn the pail upside down and allow to drain onto substrate.*

4. **For use as a crack-bridging membrane**, perform the following steps:
  - a. Pour a "ribbon" of material along the length of the crack area. Spread the material using a short napped roller to cover the crack a minimum of 2 inches on each side and achieve a film build of 8-10 mils along the crack.
  - b. Immediately after spreading the material along the crack, embed PolySpec Engineering Fabric into the wet material. Press the fabric into the material using the roller and gentle pressure to avoid having the fabric roll back on the roller.
  - c. Pour an additional 10-15 mils of material over the engineering fabric and spread via roller and gentle pressure to fully encapsulate the fabric.
  - d. Allow material to cure for 12 hours at 70°F. Sand any rough edges or areas where engineering fabric has wrinkled. Feather edge sand all edges of the crack repair area to provide a smooth and uniform transition for subsequent coatings applications.

**For use as a coating**, perform the following steps:

- a. Apply by roller or squeegee and back-roll. Move quickly and empty contents of pail onto surface as soon as possible to provide maximum working time. Material left in the pail will generate heat and have a reduced pot life.
- b. **OPTIONAL STEP:** When applied as a non-skid coating, broadcast clean, dry 20/40-mesh sand or aluminum oxide aggregate into wet resin. Allow to dry. A full broadcast to refusal will produce the most consistent and durable system. Brush off excess grit before applying second coat.

*NOTE: Do not broadcast aggregate into the prime coat.*

- c. After the first coat has become slightly tack free (within approximately 10 hours of cure @70°F), apply an additional coat of resin/hardener mixture according to Step A.

*NOTE: If the coating has not been recoated within 48 hours, a light sanding followed by a wipe with a 50:50 mixture of water and isopropanol may be necessary. Allow the solvent to flash before applying coating.*

5. For best results, clean tools and equipment with PolySpec® All Purpose Cleaner, a nonflammable and non-evaporating cleaner. Always wear gloves when using this product.

1R:1H / DOC FEC2234-TDS

FEC and PolySpec are ® Registered Trademarks of PolySpec L.P.

Thiokol is a ® Registered Trademark of Toray Fine Chemicals Co., Ltd.

Rev 03/05

© Copyright 2005 PolySpec L.P. All rights reserved. Published technical data and instructions are subject to change without notice. Please visit the online catalog at [www.polyspec.com](http://www.polyspec.com) for the most current technical data and instructions. Or, you may contact your PolySpec representative for current technical data and instructions.

PolySpec, L.P. warrants its products to be free from defects in material and workmanship. PolySpec's sole obligation and Buyer's exclusive remedy in connection with the products shall be limited, at PolySpec's option, to either replacement of products not conforming to this warranty or credit to Buyer's account in the invoiced amount of the nonconforming products. Any claim under this Warranty must be made by Buyer to PolySpec in writing within five days of Buyer's discovery of the claimed defect, but in no event later than the expiration of the applicable shelf life, or one year from the delivery date, whichever is earlier. Buyer's failure to notify PolySpec of such nonconformance as required herein shall bar Buyer from recovery under this warranty.

PolySpec makes no other warranties concerning this product. No other warranties, either expressed or implied, or statutory, such as warranties of merchantability or fitness for a particular purpose, shall apply. In no event shall PolySpec be liable for consequential or incidental damages.

Any recommendation or suggestion relating to the use of the products made by PolySpec, whether in its technical literature, or in response to specific inquiry, or otherwise, is based on data believed to be reliable; however, the products and information are intended for use by Buyers having requisite skill and know-how in the industry, and therefore it is for the Buyer to satisfy itself of the suitability of the products for its own particular use, and it shall be deemed that Buyer has done so, at its sole discretion and risk. Variation in environment changes in procedures of use, or extrapolation of data may cause unsatisfactory results. PolySpec cannot guarantee that color will conform to sample, if provided.